




Blind Rivet - Closed End Dome Head

Material: A2/A2 - ISO 16585

Part No: 4013S2

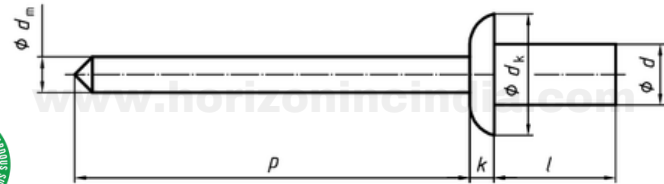

| | | | | |
|-----------------------------|----------------|----------------|--------------|----------------|
| d | 3.2 | 4 | 4.8 | 6.4 |
| dk | 6.7 | 8.4 | 10.1 | 13.4 |
| k | 1.3 | 1.7 | 2 | 2.7 |
| dm | 2.15 | 2.75 | 3.2 | 3.9 |
| p | 25 | 25 | 27 | 27 |
| Hole diameter | 3.3-3.4 | 4.1-4.2 | 4.9-5 | 6.5-6.6 |
| Tensile Strength N | 2200 | 3500 | 4400 | 8000 |
| Shear Strength N | 2000 | 3000 | 4000 | 6000 |
| Mandrel Break Load N | 4500 | 6500 | 8500 | 16000 |

Dimensions in mm

Part Numbers

| Diameter | Part number | Size | Grip Range |
|------------|--------------|--------|------------|
| 3.2 | 4013S2-32006 | 3.2x6 | 0.5-1.5 |
| | 4013S2-32008 | 3.2x8 | 1.5-3.0 |
| | 4013S2-32010 | 3.2x10 | 3.0-5.0 |
| | 4013S2-32012 | 3.2x12 | 5.0-6.5 |
| | 4013S2-32014 | 3.2x14 | 6.5-5.0 |
| 4.0 | 4013S2-40006 | 4x6 | 0.5-1.5 |
| | 4013S2-40008 | 4x8 | 1.5-3.0 |
| | 4013S2-40010 | 4x10 | 3.0-5.0 |
| | 4013S2-40012 | 4x12 | 5.0-6.5 |
| | 4013S2-40016 | 4x16 | 6.5-10.5 |
| 4.8 | 4013S2-48008 | 4.8x8 | 0.5-3.0 |
| | 4013S2-48010 | 4.8x10 | 3.0-5.0 |
| | 4013S2-48012 | 4.8x12 | 5.0-6.5 |
| | 4013S2-48016 | 4.8x16 | 6.5-10.5 |
| | 4013S2-48020 | 4.8x20 | 9.0-12.0 |
| 6.4 | 4013S2-64012 | 6.4x12 | 1.5-6.5 |
| | 4013S2-64016 | 6.4x16 | 6.5-8.0 |
| | 4013S2-64020 | 6.4x20 | 8.0-12.0 |
| | 4013S2-64025 | 6.4x25 | 12.0-17.0 |

