




Hi-Lock - Interlock Type Structural Blind Rivet - Dome Head

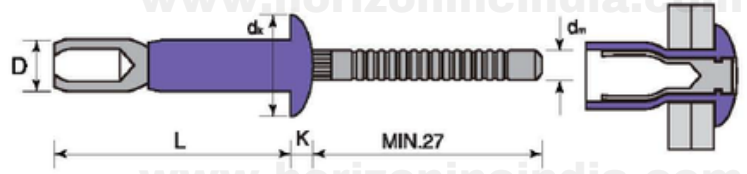

Material: Steel

Part No: 4022C1

Size	Part No	L max	Grip Range	dk max	k max	dm max	Hole Dia	Tensile Strength N (min)	Shear Strength N (min)
4.8 x 10	4022C1-48010	18.2	1.57-6.86	10.2	2.1	3.1	4.9-5.1	4400	5600
4.8 x 14	4022C1-48014	24.6	1.57-11.1						
6.4 x 14	4022C1-64014	25.3	2.03-9.53	13.5	2.9	4.1	6.7-7.0	8200	10500
6.4 x 19	4022C1-64019	35.6	2.03-15.88						

Material: Stainless Steel

Part No: 4022S2

Dimensions in mm

Size	Part No	L max	Grip Range	dk max	k max	dm max	Hole Dia	Tensile Strength N (min)	Shear Strength N (min)
4.8 x 10	4022S2-48010	18.2	1.57-6.86	10.2	2.1	3.1	4.9-5.1	4400	5600
4.8 x 14	4022S2-48014	24.6	1.57-11.1						
6.4 x 14	4022S2-64014	25.3	2.03-9.53	13.5	2.9	4.1	6.7-7.0	8200	10500
6.4 x 19	4022S2-64019	35.6	2.03-15.88						

