




Blind Rivet - Closed End CSK Head

Material: St/St - Conforming to ISO 15976

Part No: 4014C1

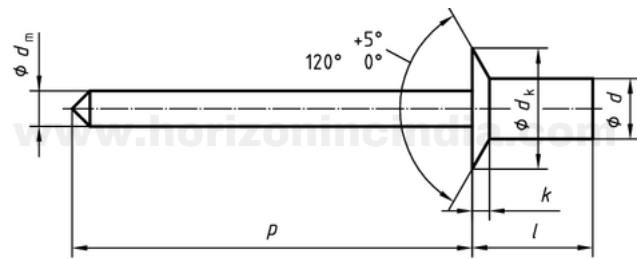

d	3.2	4	4.8
dk	6.7	8.4	10.1
k	1.3	1.7	2
dm	1.85	2.35	2.77
p	25	25	27
Hole diameter	3.3-3.4	4.1-4.2	4.9-5
Tensile Strength	1300 N	1550 N	2800 N
Shear Strength	1150 N	1700 N	2400 N
Mandel Break Load	4000 N	5700 N	7500 N

Dimensions in mm

Part Numbers

Diameter	Part number	Size	Grip Range
3.2	4014C1-32608	3.2X8	2.0-3.5
	4014C1-32905	3.2x9.5	3.5-5.0
	4014C1-32125	3.2x12.5	6.5-8.0
4.0	4014C1-40008	4x8	2.0-3.5
	4014C1-40905	4x9.5	3.5-5.0
	4014C1-40125	4x12.5	6.5-8.0
	4014C1-40145	4x14.5	8.0-10.0
4.8	4014C1-48008	4.8x8	0.5-3.5
	4014C1-48905	4.8x9.5	3.5-5.0
	4014C1-48011	4.8x11	5.0-6.5
	4014C1-48013	4.8x13	6.5-8.0
	4014C1-48145	4.8x14.5	8.0-9.5
	4014C1-48016	4.8x16	9.5-11.0
	4014C1-48018	4.8x18	11.0-13.0
	4014C1-48021	4.8x21	13.0-16.0
	4014C1-48025	4.8x25	16.0-20.0

